


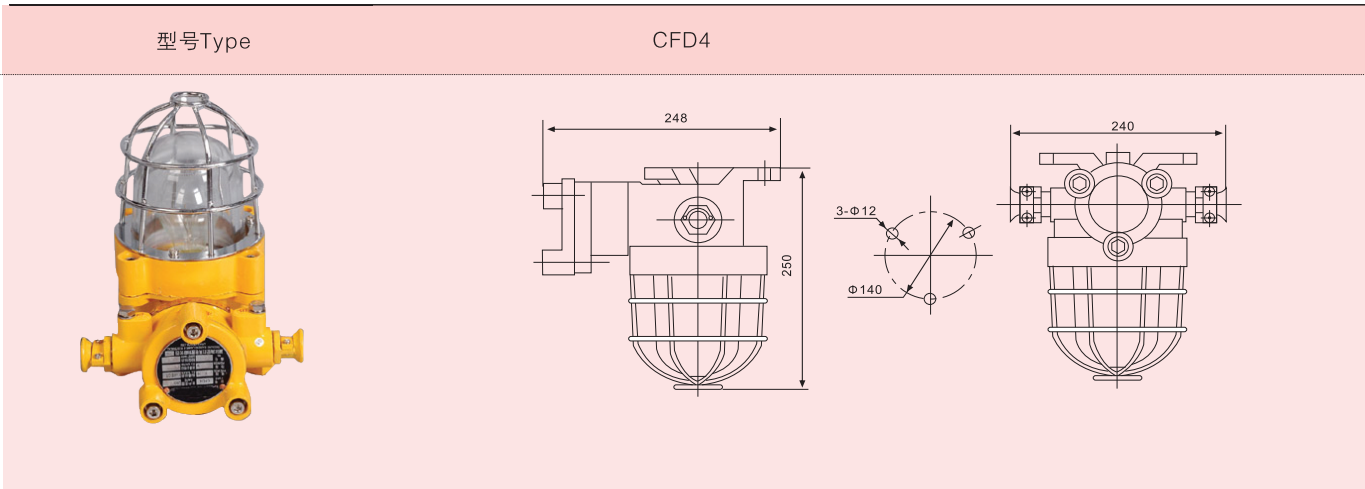

适用范围 The scope

适用于含有氢气与空气混合物，乙炔气体与空气混合物及其它含有可燃性气体混合物的1-2区危险场所照明用。
Fit for the illumination in 1-2 zone dangerous places of hydric gas and air admixture, ethyne and air admixture and other flammable gas admixture.

产品认证 Product certification

- 1.经国家级照明灯具防爆安全监督压站检验
- 2.经中国船级社“CCS”形式认可
- 1.Passed the examination of National Explosion-proof Safety Supervisal and Inspection Station for Luminaire.
- 2.Approved by CCS (China Classification Society).

产品特点 Products characteristic

- 1、壳体为优质黄铜铸造成型，钢化玻璃灯罩，铜质网罩；
- 2、填料函分两种，一种为管螺纹式，螺纹为G3/4；一种为喇叭式。
- 1. The shell is made of good quality brass foundry, toughened glass lampshade, copper material net shind.
- 2. The giand has two kind, one is tube screw type screw is G3/4; Another one is bugle-type.

采用标准 Adopt standard

符合国际GB12045《船用防爆灯技术条件》。
Conform to National standard GB12045<The technical condition of Marine explosion-proof light>.

规格 Specification

型号 Type	防爆标志 Explosion-proof Mark	电压 Voltage	功率 Power	光源 Illuminant	灯头形式 Lamp Holder	电缆外径 Cable Outside Diameter	防护等级 Protection Class	材质 Material	重量 Weight
CFD4a	Exd II CT4	24V-220V	60W	白炽灯 Incandescent	E27	Φ11-Φ14	IP56	铜 Copper	10kg
CFD4b	Exd II CT6	24V-220V	25W	白炽灯 Incandescent	E27	Φ11-Φ14	IP56	铜 Copper	10kg
CFD4c	Exd II CT3	220V	100W	白炽灯 Incandescent	E27	Φ11-Φ14	IP56	铜 Copper	10kg