


CFT3-L 防爆投光灯
EXPLOSION-PROOF SPOT LIGHT

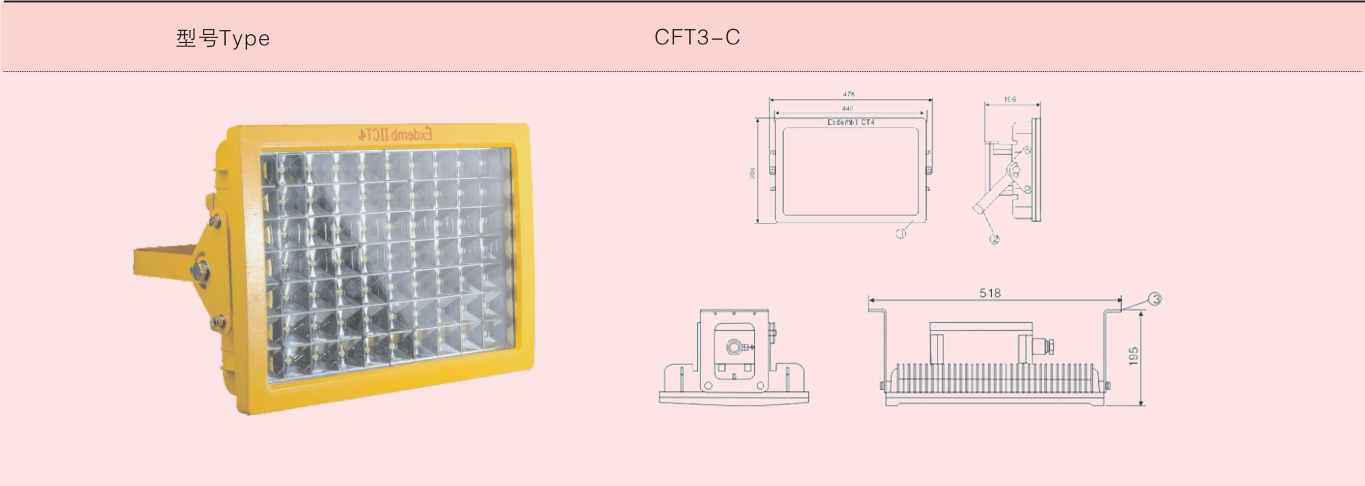

适用范围 The scope of application

适用于爆炸性气体环境场所1区、2区场所照明使用。
Applied to illumination of explosive gas place zone 1 or zone 2.

产品特点 Products characteristic

1. 灯具和电器箱分体式设计，结构紧凑合理并确保防爆性能。

2. 灯具可在垂直方向±45度内任意调节。

3. 外壳采用高强度铝合金材料，具有较高抗强力碰撞和冲击能力。

4. 透明件采用高强度钢化玻璃，能承受高机械强度和温度剧变。

5. 反射器采用高纯度铝板，表面桔纹状阳极化处理，并通过精确配光设计，反光效率高。
1. The light body and ballast box is divide body design it has the faction of compact structure structure and ensure explosion proof.

2. The light can adjust vertical ±45° .

3. The shelladopt high intensity aluminum alloy material, it has the ability of high collision proof and shock proof.

4. The transparent part adopt aluminum allay, it can bear high machinery strength and temperature change.

5. The reflector adopt high purity aluminum plate, the eurface through anodizing treatment and through exact light distribufion design good effect of reflector.

规格 Specifications

型号 Model	防爆标志 Explosion-proof mark	电压 Voltage	功率W Power	光通量lm luminous flux	光源 illuminant	电缆外径 Cable outside diameter	防护等级 protection class	重量 Weight	备注 Remark
CFT3-L	Exde II BT2	220V/50Hz 220V/60Hz	100W	10000	LED	φ 11-φ 13	IP56	9.2kg	

采用标准 Adopt standard

符合国际IEC标准和GB3836、GB7000.7-2005标准要求。
Conform to International IEC standard and GB3836、GB7000.7-2005