


10A/16A船用铜质带开关插座
10A/16A MARINE BRASS SOCKET WITH SWITCH

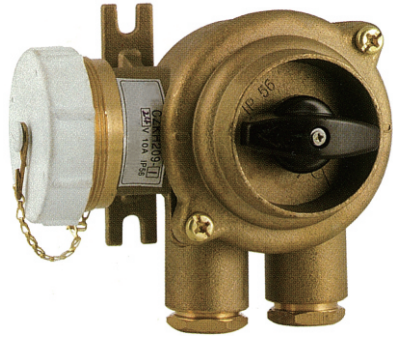

防护等级: IP56
电缆外径: $\phi 14-\phi 16$
Protection class: IP56
Cable outside Diameter: $\phi 14-\phi 16$

技术特性:

1. 供舰船交直流低电压电器线路连接、接通与分断电路用;
2. 插头单极拔出应为 $\geq 4N$;
3. 导电部分的温升不超过40K;
4. 金属外表有可靠接地装置;
5. 盖板螺丝为M6防松螺钉。

产品认证

1. 通过欧共体CE认证;
2. 通过中国船级社"CCS"认证。

采用标准

DIN89263

Technical chracteristic



1. Used for connecting cutting on or off the appliancate circuit with AC or DC low-voltage.
2. The single pole of plug pulled out should be not less than 4N.
3. The temperature rise of conductive part should don't exceed 40K.
4. The metal shell should have reliable earthing device.
5. The screw of cover plate is M6 locking screw.

Production authentication

1. Approved by CE.
2. Approved by CCS(China Classification Society).

Adopt standard

DIN89263

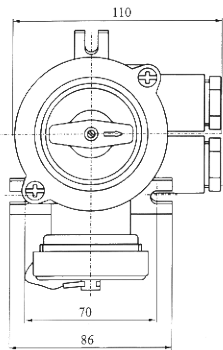

电压 Voltage	24V	125V	250V	500V	500V
插销示意图 Plug pin diagram					
代号 Code	1144				
一般电缆型号 General cable type	CZKH101-1	CZKH101-2	CZKH101-3	CZKH101-4	CZKH101-5
屏蔽电缆型号 Shield cable type	CZKH111-1	CZKH111-2	CZKH111-3	CZKH111-4	CZKH111-5
重量 Weight	1.50kg	1.60kg	1.60kg	1.60kg	1.70kg
代号 Code	1144/R				
一般电缆型号 General cable type	CZKH109-1	CZKH109-2	CZKH109-3	CZKH109-4	CZKH109-5
屏蔽电缆型号 Shield cable type	CZKH119-1	CZKH119-2	CZKH119-3	CZKH119-4	CZKH119-5
重量 Weight	1.50kg	1.60kg	1.60kg	1.60kg	1.70kg
代号 Code	1144/D				
一般电缆型号 General cable type	CZKH201-1	CZKH201-2	CZKH201-3	CZKH201-4	CZKH201-5
屏蔽电缆型号 Shield cable type	CZKH211-1	CZKH211-2	CZKH211-3	CZKH211-4	CZKH211-5
重量 Weight	1.70kg	1.80kg	1.80kg	1.80kg	1.90kg
代号 Code	1144/2		1.80kg		
一般电缆型号 General cable type	CZKH202-1	CZKH202-2	CZKH202-3	CZKH202-4	CZKH202-5
屏蔽电缆型号 Shield cable type	CZKH212-1	CZKH212-2	CZKH212-3	CZKH212-4	CZKH212-5
重量 Weight	1.70kg	1.80kg	1.50kg	1.80kg	1.690kg
代号 Code	1144/2/R				
一般电缆型号 General cable type	CZKH209-1	CZKH209-2	CZKH209-3	CZKH209-4	CZKH209-5
屏蔽电缆型号 Shield cable type	CZKH219-1	CZKH219-2	CZKH219-3	CZKH219-4	CZKH219-5
重量 Weight	1.70kg	1.80kg	1.80kg	1.80kg	1.90kg