


JCY荧光舱顶灯 FLUORESCENT PENDANT LIGHT

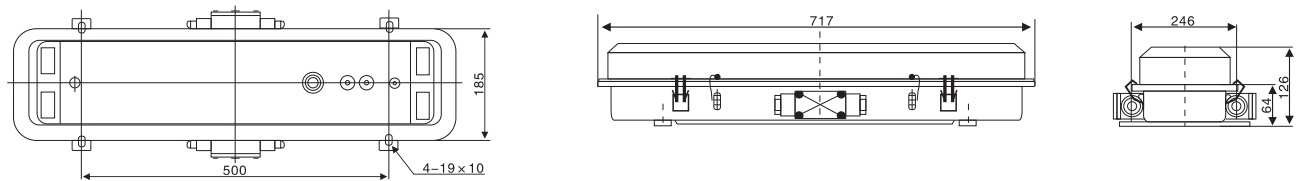

适用范围 The scope of application

1. 适用于各类船舶有滴水、溅水和凝水的场所照明之用，如机炉舱、干货舱、轴隧、管弄、露天甲板等场所作照明之用；
2. 工作环境温度为-20℃ ~ +55℃。

1. Applied to illumination of water dripping, water spattering, water coagulating place in ships, such as oven cabin, dry cabin, tunnel, pipeline and weather deck etc.
2. the environmental temperature for work is -20℃ ~ +55℃.

产品特点 Products characteristic

1. 壳体采用优质钢板拉伸成型，灯罩采用PC注塑成型,具有密封性能结构；
 2. 为防止触电,灯具内装有带⊕标记的铜质接线柱；
 3. 插脚式灯座，外置接线盒，接线方便；
 4. 灯具具有应急装置,配有B15d灯座,24V/15W小应急灯泡，其灯罩的边缘标有红色圆形标志；
 5. 灯具内部配置补偿电容，启动效果好等特点。
1. The shell adopts good quality steel plate tensioned, lampshade adopts injection of PC, and has the seal structure.
 2. In order to prevent from electric shock, the lights equipped with a copper earthing rod with the mark ⊕.
 3. Plug-in type lamp holder, equipped junction box outside, convenient to connect.
 4. The lamp has the emergency device, equipped B15d lamp holder, 24V/15W small emergency bulb, the edge of lampshade marks the red circular marking.
 5. Equipped compensating capacitance inside the lamp, also has the good effect of start.

产品认证与标准 Product authentication and standard

符合JISF8008-2002 标准与《钢质海船入级规范》。
Conform to JISF8008-2002 standard and GRADE ENTRY NORMS FOR STEEL SHIPS.

规格 Specifications

IMPA CODE	型号 type	功率 Power	电压 Voltage	补偿电容 compensating capacitance	功率因数 Power factor	灯座 Lamp holder	电缆外径 Cable outside diameter	防护等级 protection class	重量 Weight
	JCY26-1	1×20W	110V/60Hz 220V/50Hz 220V/60Hz	4.75 μf	>0.85	G13	Φ 14-Φ 16	IP56	7.2kg
791882/791913	JCY26-2	2×20W		7.5 μf	>0.85				7.2kg
	JCY26-2E	2×20W		7.5 μf	>0.85				7.2kg
791862/791909/ 791872/791911	JCY26-2EF	24V/15W		7.5 μf	>0.85				7.2kg