


JPY荧光蓬顶灯  
FLUORESCENT CEILING LIGHT

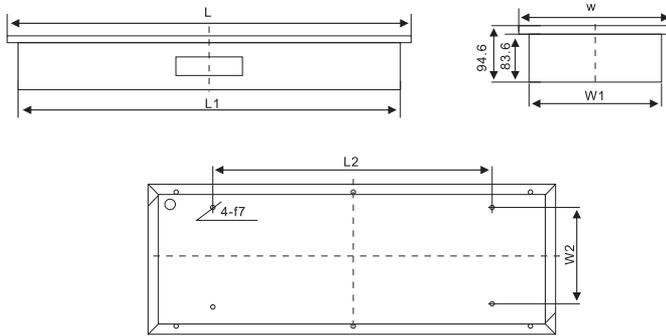

	L	L1	L2	W	W1	W2
JPY21-2	685	650	475	255	220	170
JPY31-2	990	957	390×2	255	220	171
JPY41-2	1295	1262	542.5×2	255	220	171

**适用范围 The scope of application**

用于干燥舱室，如船员和旅客的居住舱、休息室、餐厅、驾驶室、报务室等场所。

Applied to dry cabin, such as the residence, rest room, dining room, cab, operator of the sailors and passengers

**产品特点 Products characteristic**

1. 灯具安装方式为嵌入式，结构紧凑，外观精致；
2. 灯罩为优质亚克力板制成，不变色、韧性好，光线柔和；
3. 灯具内部配置补偿电容，启动效果好，灯座为旋转式，接触性能好；
4. 灯具可配有B15d灯座,用于24V/15W应急灯泡照明，其灯罩的边缘标有●标志，订货时请注明需应急装置。

1. The installation way of the light is recessed-type, compact structure and delicacy appearance.
2. The lampshade is made of good quality organic, not discolor, fine toughness, softness ray.
3. Equipped compensating capacitance inside the lamp holder, also has the good effect of start, spin-type of lamp holder, has fine contact function.
4. The lamp equipped B 15d lampholder, used for 24V/15W emergency bulb, the edge of lampshade marks the ● marking, remark clear than need the emergency device when order.

**规格specification**

型号 type	功率 power	电压 voltage	功率因数 Power factor	灯座 Lamp holder	防护等级 Protection class	重量 Weight
JPY21-2、JPY21-2E	2×20W	110V/60Hz 220V/50Hz 220V/60Hz	> 0.85	G13	IP44	8.0kg
JPY31-2、JPY31-2E	2×30W					9.5kg
JPY41-2、JPY41-2E	2×40W					11.5kg