


JPY荧光蓬顶灯
FLUORESCENT CEILING LIGHT

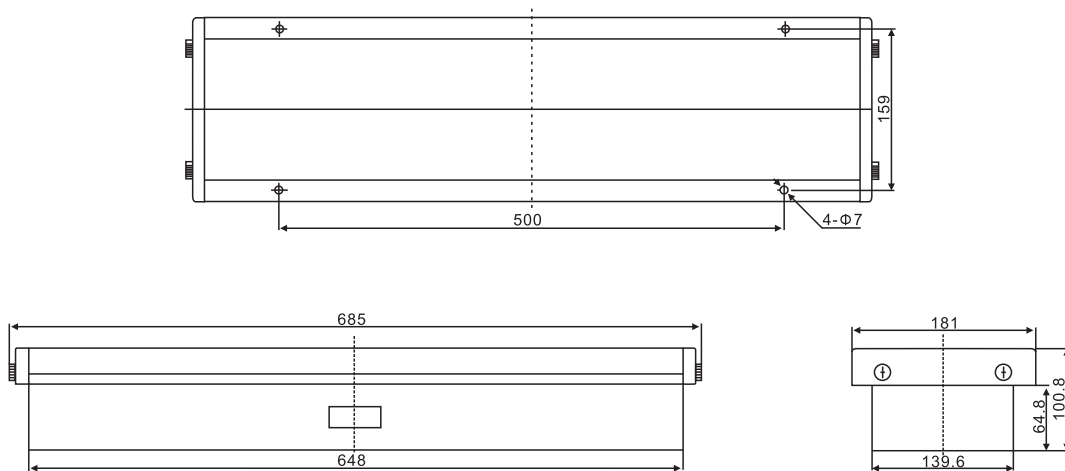

适用范围 The scope of application:

用于干燥舱室，如船员和旅客的居住舱、休息室、餐厅、驾驶室、报务室等场所

Applied to dry cabin, such as the sailor and the residence, retiring room, dining room, cab, operator of passengers

产品特点 Products characteristic

- 1、灯具安装方式为嵌入式，结构紧凑，外观精致；
- 2、灯具内部配置补偿电容，启动效果好，灯座为插脚式，接触性能好；

- 1、The installation way of the light is recessed type, compact structure and delicacy appearance.
- 2、Equipped compensating capacitance inside the lamp holder, also has the good effect of start, plug-in type of lamp holder, has fine contact function.

产品认证 Production authentication

采用标准 Adpot standard符合JISF8008-2010.

Conform to the Japanese standard JISF8008-2010.

规格specification

型号 type	功率 power	电压 voltage	补偿电容 Compensating capacitance	功率因数 Power factor	灯座 Lamp holder	防护等级 Protection class	重量 Weight
JPY24-1	1 × 20W	220V/50Hz	4.75 μf	>0.85	G13	IP34	5.2kg
JPY24-2	2 × 20W	220V/60Hz 110V/60Hz	7.5 μf	>0.85			5.2kg