
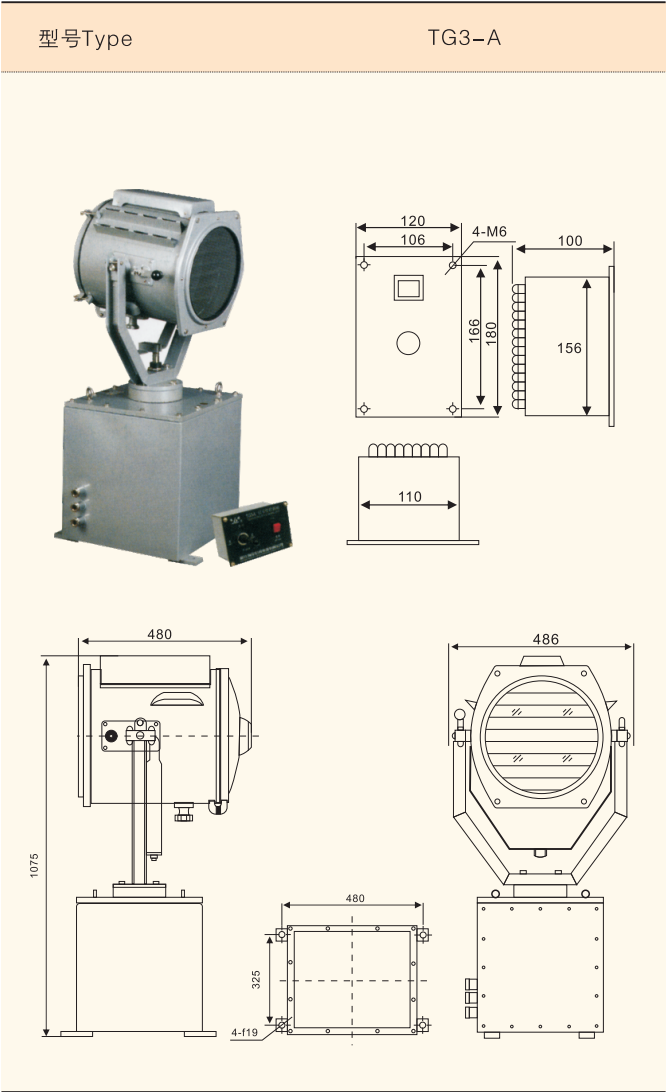


TG3、TG3-A信号探照灯
SIGNAL SEARCHLIGHT

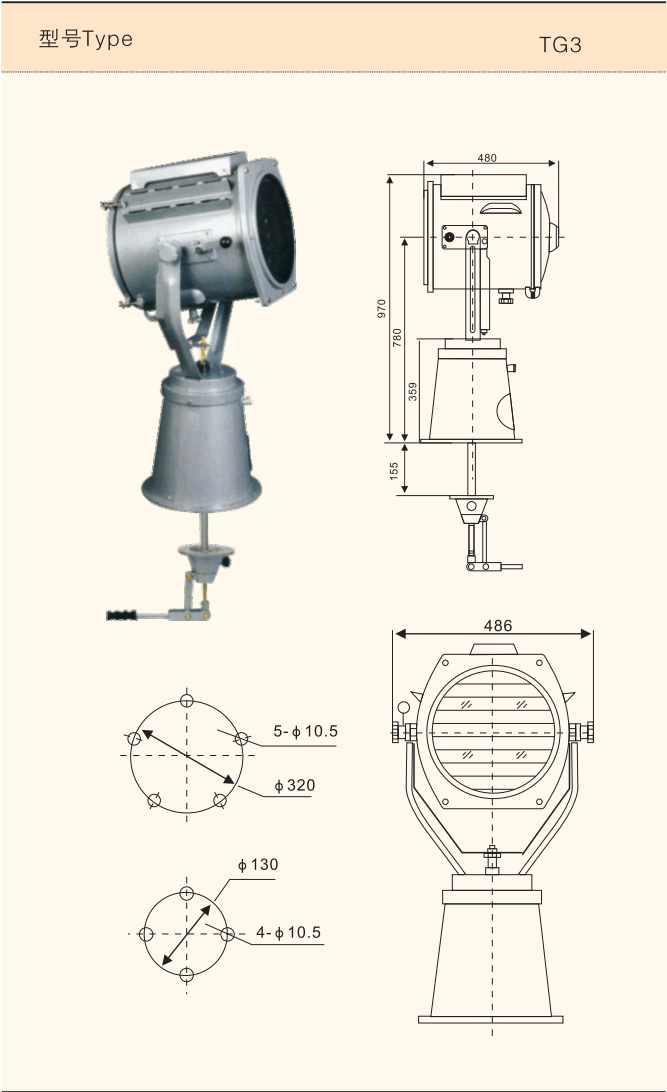

适用范围: The scope of application:

适用于各类船舶间的信号交换之用，能见距离15n.m。
Applied to signal exchange among ships, the visibility distance is 15n.m.

产品特点: Products characteristic:

1. 灯壳体下方设有调焦螺母，可调节灯光焦距；
 2. 灯具内设有格栅，操纵手柄，可按需要发出灯光信号；
 3. 通过升降杆或控制器，可使灯体水平旋转180°，俯仰30°。
1. Equipped focus nut under the light shell, can adjust lighting focus.
 2. Inside the light equips grid, joy stick, and can send the lighting signal according to the requirement.
 3. Can rotate for 180° horizontally, andpitching 30° by the lift-hole or controller.

规格: Specification

型号 type	电压 Voltage	功率 Power	灯头 Lamp holder	光源 illuminant	光通量 LM luminous flux	材质 material	防护等级 Protection class	电缆外径 Cable outside diameter	重量 Weight	附件 annex
TG3	DC110V	1000W	E40	白炽聚光灯泡 incadescent focus bulb	17000	钢steel	IP56	φ10-φ12	47.5kg	升降杆lifter
TG3-A	AC220V	1000W	E40		17000	钢steel	IP56	φ10-φ12	82kg	控制器controller