


TG14、TG15投光灯  
SPOT LIGHT

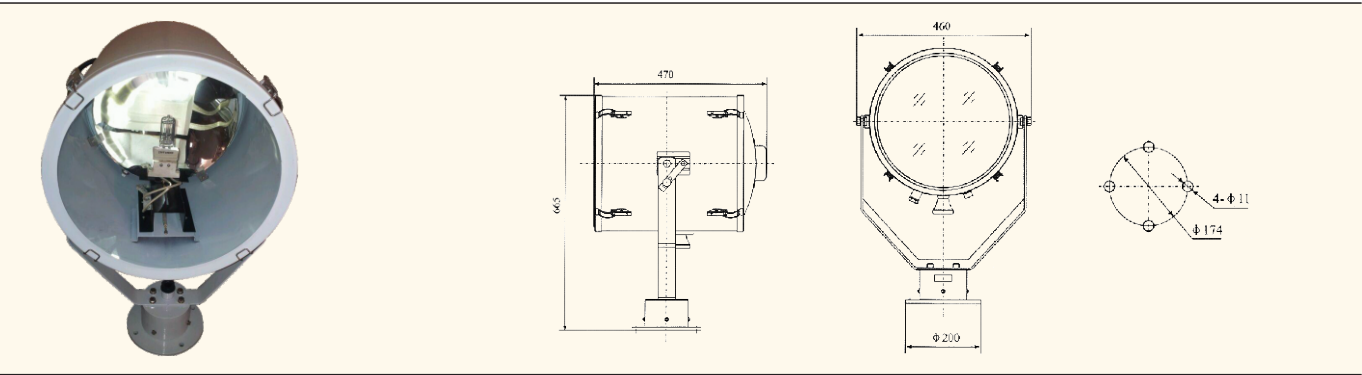

适用范围: The scope of application:


适用于船舶、矿山、码头、建筑工地等处大面积照明。  
Fit for large area illumination of ship,mine, wharf building site etc.

产品特点: Products characteristic:

1. 灯壳体下方设有调焦螺母，可调节灯光焦距；
  2. 灯罩为透明安全玻璃、球面钢化玻璃反光镜，能够发出光线集中的强光束；
  3. 灯体可水平旋转180°，俯仰30°。
1. Equipped focus nut under the light shell,can adjust lighting focus.
  2. The lampshade is transparent safe toughende glass,sphere toughened glass reflector, can send the intensity light-beam which is concen trated.
  3. The light body can rotate for ± 180° horizontally, and pitching 30° .

规格: Specification

| 型号<br>type | 电压<br>Voltage    | 功率<br>Power | 灯座<br>Lamp holder | 光源<br>illuminant                                               | 光通量 LM<br>luminous flux | 材质<br>material | 防护等级<br>Protection class | 电缆外径<br>Cable outside diameter | 重量<br>Weight |
|------------|------------------|-------------|-------------------|----------------------------------------------------------------|-------------------------|----------------|--------------------------|--------------------------------|--------------|
| TG14       | DC110V<br>AC220V | 1000W       | E40/GY16          | 白炽聚光灯泡/卤钨灯<br>Incandescent focus bulb<br>Turgsten halogen lamp | 17000                   | 钢steel         | IP56                     | 10 - 12                        | 24.5kg       |

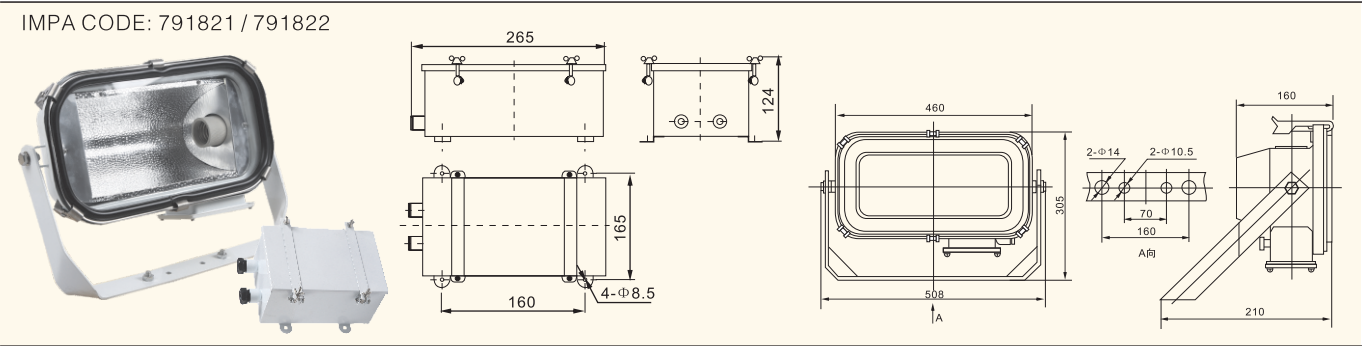

适用范围: The scope:

适用于各种船舶、码头、船坞、广场及隧道照明。  
Fit for illumination of ship, charf, dock, plaza and tunnel.

产品特点: Products characteristic:

1. 灯体采用不锈钢板拉伸而成，粉末涂层，阳极化处理的高纯度铝质反射器，灯罩采用透明钢化玻璃。
  2. 灯体密封性能好，耐腐蚀强，壳体向上90°，向下45° 调节。
1. The light body adopts stainless steel tensioned, powder coat, high-purity aluminum reflector of anodic disposal, the lampshade adopts transparent toughened glass.
  2. The light body has the good sealed function, intensity corrosive-resisting, the shell can adjust upside 90° ,down 45° 。

规格 Specification

| 型号<br>Type | 电压<br>Voltage | 功率<br>Power | 灯头<br>Lamp<br>Holder | 光源<br>Illuminant                               | 光通量LM<br>luminous Flux | 材料<br>Material         | 防护等级<br>Protection<br>class | 重量<br>Weight | 附件<br>Annex |
|------------|---------------|-------------|----------------------|------------------------------------------------|------------------------|------------------------|-----------------------------|--------------|-------------|
| TG15       | 110V/60Hz     | 250W        | E40                  | NG250T,NG400T高压钠灯<br>High-pressure Sodium Lamp | 26000                  | 不锈钢<br>Stainless Steel | IP56                        | 16.0kg       | 镇流器 Ballast |
|            | 220V/50Hz     | 400W        |                      |                                                | 47000                  |                        |                             |              |             |
|            | 220V/60Hz     |             |                      |                                                |                        |                        |                             |              |             |