

### 概述Overview



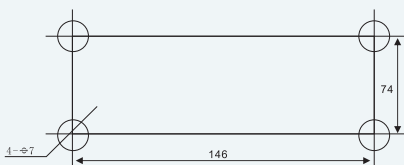
音响信号器是船上重要而简单的联络。报警工具，可及时地发出特种信号，指示某种异常现象的发生，同时也是船上电话、通讯设备、传令钟及其它电器设备的配套仪器。

Sound annunciator is an important and simple tool for communication on ships. An alarm can send out special signal in time to indicate the occurrence of certain abnormal phenomenon, at the same time, it is also used as marine telephone, communication device, command alarm and other electrical appliances on ships.

### 主要技术性能Main technical performances






- 1、适用环境温度：-25℃- +55℃。
  - 2、电源电压在额定值的直流 ± 15%，交流+6% - 10%的范围内变化时，能可靠的工作，其音响强度不小于规定值。
  - 3、防护等级：IP56
1. Suitable environmental temperature: -25℃-+55℃
  2. It can reliably work when the power voltage ranges within ± 15% for DC current, +6%-10% for AC current Of its rated voltage, and its sound intensity will not lower than the value stipulated
  3. The protection class: IP56

### 规格Specifications

图片 Photo	产品名称 Name	型号 Type	电压 Voltage	电流 ≤Current	音响强度 Sound Intensity	重量 Weight
	直流断电式电铃 DC power-fall Electric Bell	YLK-24Z	24V	0.1A	86dB	1.7kg
		YLK-110Z	110V	0.05A		
		YLK-220Z	220V	0.03A		
	交流短接式电铃 AC short-connect electric bell	YLB-24J	24V			
		YLB-110J	110V			
		YLB-220J	220V			
直流电铃 AC Electric Bell	YL-24Z	24V	0.15A	82dB		
	YL-110Z	110V	0.08A			
	YL-220Z	220V	0.04A			
	直流警钟 DC Alarm Bell	YZ-24Z	24V	0.1A	92dB	2.0kg
		YZ-110Z	110V	0.05A		
		YZ-220Z	220V	0.03A		
	交流警钟 AC Alarm Bell	YZ-24J	24V	0.15A	82dB	2.0kg
		YZ-110J	110V	0.08A		
		YZ-220J	220V	0.04A		
安装尺寸 Dimension						56×30×37

船用音响信号  
MARINE SOUND SIGNALS

规格Specifications

图片 Photo	产品名称 Name	型号 Type	电压 Voltage	电流 ≤Current	音响强度 Sound Intensity	重量 Weight
	直流电铃 DC Electric Bell	YL120-24Z	24V	0.3A	85dB	2.0kg
		YL120-110Z	110V	0.1A		
		YL120-220Z	220V	0.05A		
	交流电铃 AC Electric Bell	YL120-24J	24V	0.2A	IMPA CODE:793433	
		YL120-110J	110V	0.1A		
		YL120-220J	220V	0.05A		
	直流信号灯电铃 DC Electric Bell for Signal Light	Y LX120-24Z	24V	0.8A	85dB	2.1kg
		Y LX120-110Z	110V	0.3A		
		Y LX120-220Z	220V	0.2A		
	交流信号灯电铃 AC Electric Bell for Signal Light	Y LX120-24J	24V	0.8A	IMPA CODE:793443	
		Y LX120-110J	110V	0.4A		
		Y LX120-220J	220V	0.3A		
	直流电铃 DC Electric Bell	YL200-24Z	24V	0.3A	95dB	2.75kg
		YL200-110Z	110V	0.1A		
		YL200-220Z	220V	0.05A		
	交流电铃 AC Electric Bell	YL200-24J	24V	0.2A	IMPA CODE:793435	
		YL200-110J	110V	0.1A		
		YL200-220J	220V	0.05A		
	直流信号灯电铃 DC Electric Bell for Signal Light	Y LX200-24Z	24V	0.8A	95dB	2.85kg
		Y LX200-110Z	110V	0.3A		
		Y LX200-220Z	220V	0.2A		
	交流信号灯电铃 AC Electric Bell for Signal Light	Y LX200-24J	24V	0.8A	IMPA CODE:793445	
		Y LX200-110J	110V	0.4A		
		Y LX200-220J	220V	0.3A		
安装尺寸 Dimension						56 × 30 × 37

规格Specifications

图片 Photo	产品名称 Name	型号 Type	电压 Voltage	电流 ≤Current	音响强度 Sound Intensity	重量 Weight
	直流信号灯电铃 DC Electric Bell for Signal Light	Y LX-24Z	24V	0.6A	92dB	3.4kg
		Y LX-110Z	110V	0.2A		
		Y LX-220Z	220V	0.1A		
	交流信号灯电铃 AC Electric Bell for Signal Light	Y LX-24J	24V	0.5A	82dB	3.3kg
		Y LX-110J	110V	0.15A		
		Y LX-220J	220V	0.1A		
	直流电铃-鸣音器 DC Electric Bell -sounder	Y LM-24Z	24V	0.2A	92dB	3.8kg
		Y LM-110Z	110V	0.1A		
		Y LM-220Z	220V	0.06A		
	交流电铃-鸣音器 AC Electric Bell -sounder	Y LM-24J	24V	0.3A	82dB	3.7kg
		Y LM-110J	110V	0.1A		
		Y LM-220J	220V	0.05A		
	直流警钟-鸣音器 DC Alarm Bell -sounder	Y ZM-24Z	24V	0.2A	92dB	4.3kg
		Y ZM-110Z	110V	0.1A		
		Y ZM-220Z	220V	0.06A		
	交流警钟-鸣音器 AC Alarm Bell -sounder	Y ZM-24J	24V	0.3A	82dB	4.1kg
		Y ZM-110J	110V	0.1A		
		Y ZM-220J	220V	0.05A		
	直流鸣音器 DC sounder	Y M-24Z	24V	0.1A	92dB	1.8kg
		Y M-110Z	110V	0.05A		
		Y M-220Z	220V	0.03A		
	交流鸣音器 AC sounder	Y M-24J	24V	0.15A		
		Y M-110J	110V	0.08A		
		Y M-220J	220V	0.04A		

安装尺寸  
Dimension

