
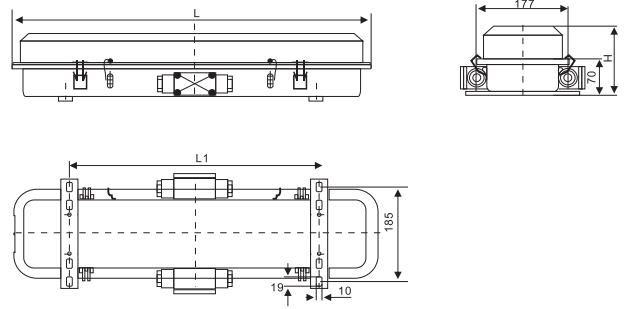


JCY荧光舱顶灯 FLUORESCENT PENDANT LIGHT

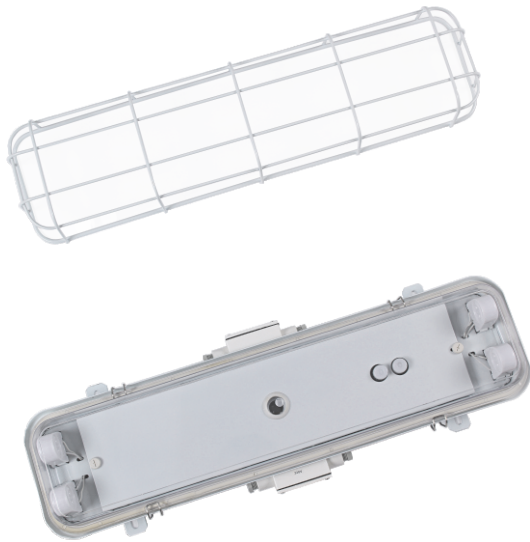

型号	L	L1	H
JCY23-2	692	480	134
JCY23-2E			134
JCY23-2EF			155
JCY33-2	992	700	134
JCY33-2E			134
JCY33-2EF			155
JCY43-2	1299	700	134
JCY43-2E			134
JCY43-2EF			155

适用范围 The scope

适用于各类船舶有滴水、溅水和凝水的场所照明之用，如机炉舱、干货舱、轴隧、管弄、露天甲板等。

Fit for illumination of water dripping, water spattering, water coagulating place in ships, such as oven cabin, dry cabin, tunnel, pipeline and weather deck etc.

产品特点 Products characteristic

- 1、壳体采用优质钢板拉伸成型，灯罩采用PC注塑成型，具有密性能结构；
- 2、为防止触电，灯具内外装有带⊕标记的铜质接线柱；
- 3、插脚式灯座，内置接线端子，接线方便；
- 4、灯具可配有B15d灯座，用于24V/15W应急灯灯泡照明，其灯罩的边缘标有●标记，订货时请注明需应急装置；
- 5、灯具内部配置补偿电容，启动效果好等特点。

- 1.The shell adopts good quality steel plate tensioned, lampshade adopts injection of PC, and has the seal structure.
- 2.In order to prevent from electric shocking, equipped with a copper earthing rod with the mark ⊕ in and out the lights.
- 3.Plug-in type lamp holder, equipped wiring terminal inside, convenient to connect.
- 4.The lamp equipped B 15 lamp holder, used for 24V/15W emergency bulb, the edge of lampshade marks the ● marking. remark clear that need the emergency device when order.
- 5.Equipped compensating capacitance inside the lamp, also has the good effect of start.

采用标准 Adopt standard

符合IEC60092-306-2009标准与《钢制海船入级规范》。

Conform to IEC60092-306-209 standard and GRADE ENTRY NORMS FOR STEEL SHIPS.

规格 Specification

IMPA CODE	型号 Type	功率 Power	电压 Voltage	功率因数 Power factor	灯座 Lamp Holder	电缆外径 Cable Outside Diameter	防护等级 Protection Class	重量 Weight	备注 Remark
791882/791913	JCY23-2	2 × 20W	110V/60Hz	>0.85	Φ 14-Φ 16	G13	IP56	5.2kg	—
	JCY23-2E		220V/50Hz					5.3kg	带应急 With Emergency
791862/791909 791872/791911	JCY23-2EF		220V/60Hz					6.3kg	带应急和网罩 With Emergency and Mesh Coer
	JCY33-2	2 × 30W	110V/60Hz	>0.85	Φ 14-Φ 16	G13	IP56	8.3kg	—
	JCY33-2E		220V/50Hz					8.5kg	带应急 With Emergency
	JCY33-2EF		220V/60Hz					9.2kg	带应急和网罩 With Emergency and Mesh Coer
791884/791887	JCY43-2	2 × 40W	110V/60Hz	>0.85	Φ 14-Φ 16	G13	IP56	9.3kg	—
	JCY43-2E		220V/50Hz					9.6kg	带应急 With Emergency
791864/791867 791874/791877	JCY43-2EF		220V/60Hz					10.4kg	带应急和网罩 With Emergency and Mesh Coer